

Suspended 210 watt 1500mm model pictured
Surface-mount and sub-zero models also available

The BEST VALUE Linear LED in Australasia

NZ MADE Designed and manufactured in New Zealand

5 YEAR WARRANTY

IP65* Dust and water protection

ROBUST DESIGN Corrosion and impact resistant

HIGH PERFORMANCE High light output and efficacy

PRE-WIRED 3 metre flex and plug

MOUNTING KIT included (surface-mount or suspended)


Retail • Industrial • Commercial • Warehousing • Cold Stores • Farming

FEATURES

- Low input power - only 210 watts
- High light output - 22,000 direct lumens
- >50,000 hours B50/L70 rating
- >80 CRI
- IP65* water/dust protection
- Eco-friendly
- Heavy duty corrosion resistant aluminium body
- Ultra low maintenance
- Competitive pricing


LL1500T Estimated Lifetime

Without Maintenance

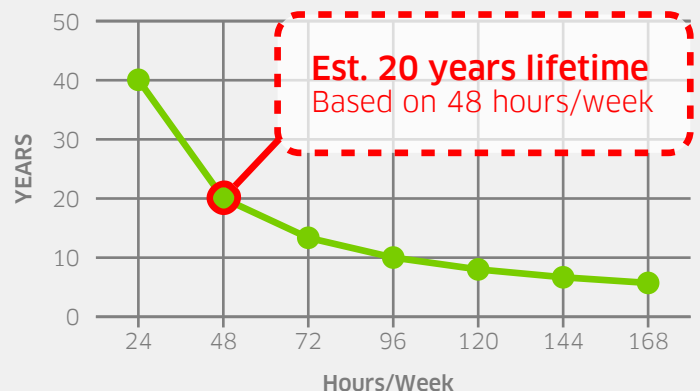


LL1500T SPECIFICATIONS

Power Consumption	210 Watts
Input Voltage	190-265 VAC 50 Hz
Power Factor	>0.975
Lumen Output	22,000 lm (direct lumens)
System Efficacy	105 lm/W
CRI	>80
Colour Temperature	5,000K (Other colour temperatures available by special order)
IP Rating	IP65* dust/water protection (*IP65 rated connection required)
Operating Temperature	-30°C to +40°C (with custom flex and plug - Model: LL1500T-SZ) 0°C to +40°C (with standard flex and plug - Model: LL1500T)
Median Useful Life	>50,000 hours (B50/L70)
Beam Angle	Wide beam diffused
Colour	White
Body	Corrosion resistant powder coated aluminium
Mounting	3 metre stainless steel wire suspension or surface-mount
Connection	3 metre flex and plug (non-IP65 rated)
Dimensions	1510mm L x 115mm W x 85mm H
Weight	4.8 kg
Warranty	5 years - complete luminaire
Certification	AS/NZS 60598

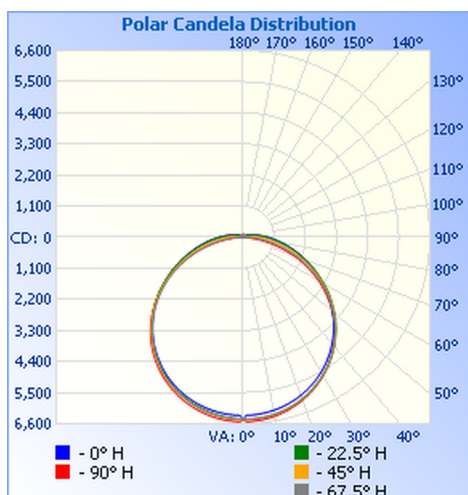

TEMPERATURE PERFORMANCE

LL1500T LED vs T5 Fluorescent Lamps

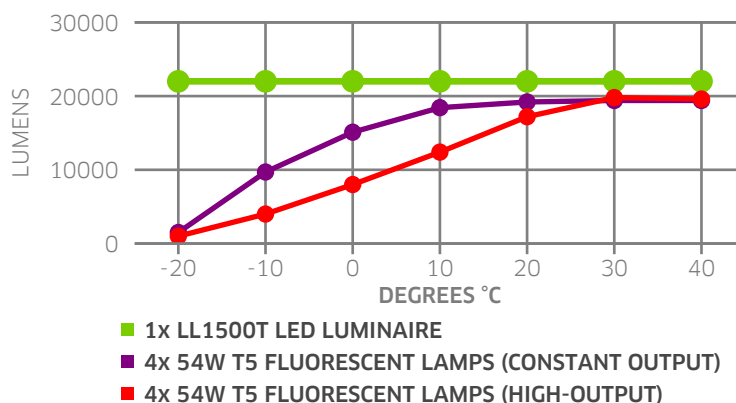

Available from...



Insist on Enolt - NZ made by bright Kiwis

www.enolt.co.nz